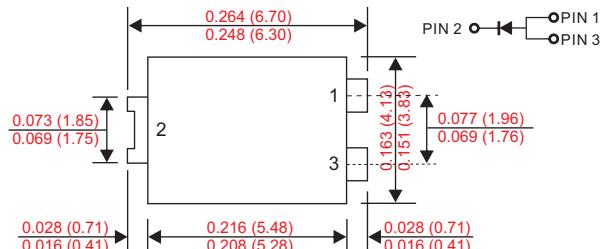


Features

- Electrostatic discharge (ESD) test under IEC6100-4-2 standard >16KV.
- Low forward voltage drop.
- Excellent high temperature stability.
- Fast switching capability.
- Suffix "G" indicates Halogen-free part, ex. 10V45.
- Lead-free parts meet environmental standards of MIL-STD-19500 /228

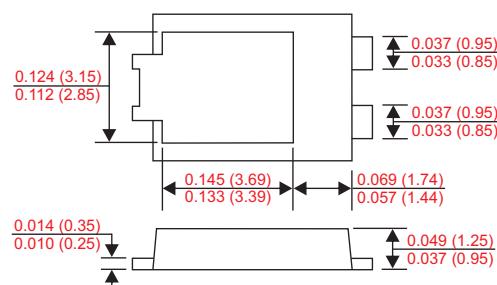
Outline

TO-277B



Mechanical data

- Epoxy : UL94-V0 rated flame retardant.
- Case : Molded plastic, TO-277B
- Lead : Solder plated, solderable per MIL-STD-750, Method 2026.
- Polarity: Indicated by cathode band.
- Mounting Position : Any.
- Weight : Approximated 0.093 grams.



Dimensions in inches and (millimeters)

Maximum ratings and electrical characteristics

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

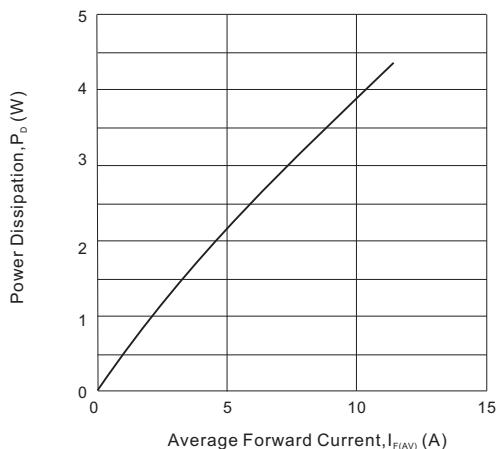
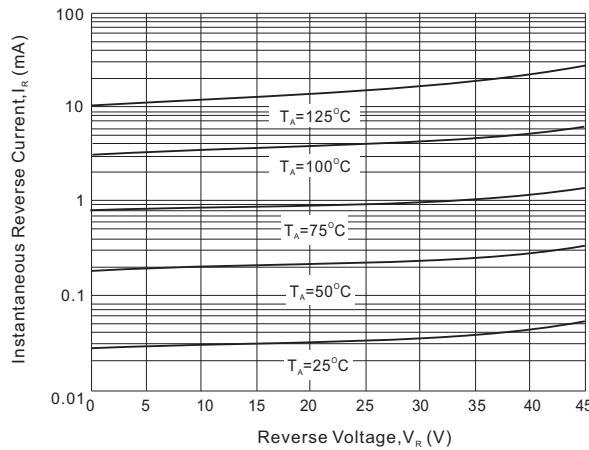
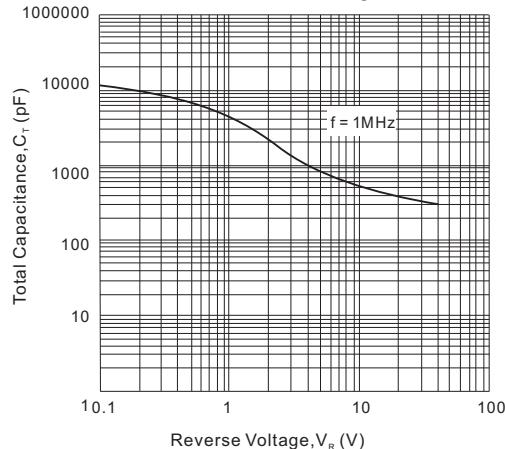
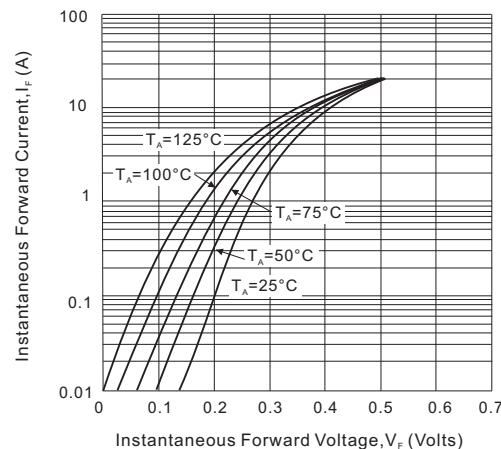
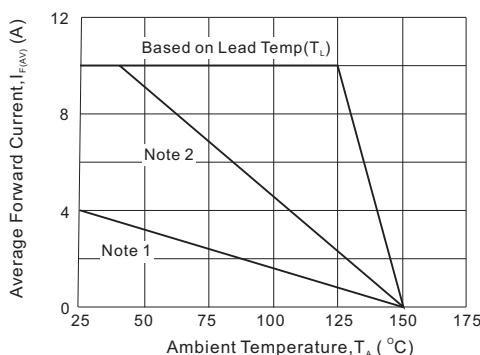
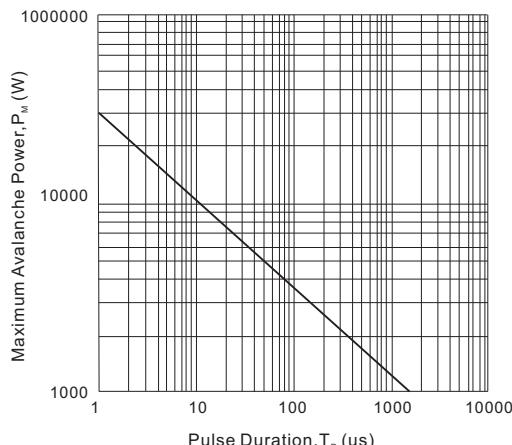
Parameter	Conditions	Symbol	10V45		UNIT
Marking code			10V45		
Peak repetitive reverse voltage		V_{RRM}			
Working peak reverse voltage		V_{RWM}	45		V
DC blocking voltage		V_{RM}			
RMS reverse voltage		$V_{R(RMS)}$	32		A
Forward rectified current		I_o	10		A
Forward surge current	8.3ms single half sine-wave superimposed on rate load (JEDEC method)	I_{FSM}	275		A
Thermal resistance	Junction to ambient(1)	$R_{\theta JA}$	73		°C/W
	Junction to ambient(2)	$R_{\theta JA}$	31		°C/W
Operating and Storage temperature		T_J, T_{STG}	-65 ~ +150		°C

Parameter	Conditions	Symbol	MIN.	TYP.	MAX.	UNIT
Reverse breakdown voltage	$I_R = 0.5mA$	$V_{(BR)R}$	45			V
Forward voltage drop	$I_F = 8A, T_J = 25^{\circ}C$	V_F		400	420	mV
	$I_F = 10A, T_J = 25^{\circ}C$			420	470	
	$I_F = 10A, T_J = 125^{\circ}C$			370	410	
Reverse current	$V_R = V_{RRM}, T_J = 25^{\circ}C$	I_R		0.051	0.3	mA
	$V_R = V_{RRM}, T_J = 100^{\circ}C$			5	15	
	$V_R = V_{RRM}, T_J = 150^{\circ}C$			27	75	

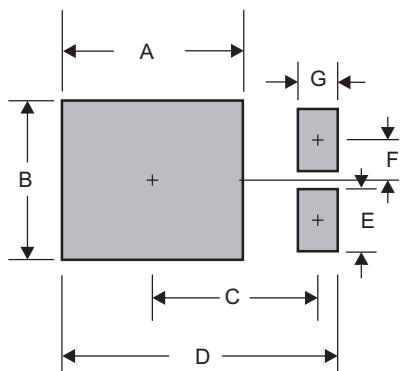
Note : 1.FR-4 PCB, 2oz.Copper.

2.Polyimide PCB, 2oz.Copper.Cathode pad dimensions 18.8mm x 14.4mm.Anode pad dimensions 5.6mm x 14.4mm.

Rating and characteristic curves

Fig. 1 - Forward Power Dissipation

Fig. 3 - Reverse Characteristics

Fig. 5 - Total Capacitance VS. Reverse Voltage

Fig. 2 - Instantaneous Forward Characteristics

Fig. 4 - Forward Current Derating Curve

Fig. 6 - Maximum Avalanche Power Curve


■ TO-277B foot print



A	B	C	D	E	F	G
0.185 (4.70)	0.142 (3.60)	0.152 (3.87)	0.260 (6.60)	0.055 (1.40)	0.035 (0.90)	0.031 (0.80)

Dimensions in inches and (millimeters)